



XBee DTE 990.006

Serial Board



Description

This is a DTE (Data Terminal Equipment) serial module, it means you can connect this device to any DCE (Data Communication Equipment) such as Modems or any DCE device equipped with a female DB9 connector.

Using our 990.002 USB XBee Board on a PC and this module on the device, you can easily transform every serial cable in a wireless connection with a maximum speed of 115K Baud and a distance of up to 1.2Km.

You can use any of the Series1 or Series2 XBee modules and make a reliable and fast serial network in minutes.

Three useful LED's show the TX activity of the Board and the signal strength (RSSI) the third LED show the associated status. You can change the function of some LED in the XBee EEPROM. The feature connector is useful to program the XBee or for powering external 3.3V devices. You can also use this module as serial level converter for 3.3V TTL signals.

Note

The DB9 Connector is Male type, it is like the serial port connector of computers.

Technical Specifications

3.3V OUT - Output Power:

depends on the XBee module used. About 300mA available with XBee, and 140mA with XBeePRO modules.

VIN - Power Requirements:

source power 4VDC to 8VDC

Dimensions: 33 x 48 mm - max height 13 mm (without XBee)

Features



TX, Associated and RSSI LEDs to monitor Serial and XBee activity

Hardware Handshaking full supported

Energy Saving Mode when the XBee go in Sleep Mode, the serial chip do the same

Feature Connector useful for programming the XBee, powering the module from a 3.3V source or power a 3.3V external device. Can be used as a serial level converter too.

Layout

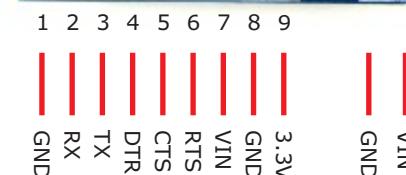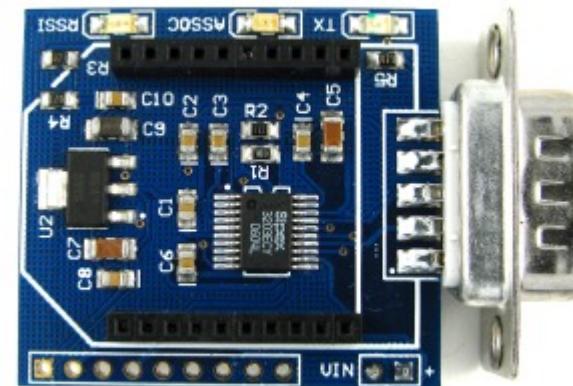


TO SERIAL
DEVICES




DROIDS SAS
VIA NANNARELLI 41
00139 ROMA ITALY
www.droids.it
info@droids.it

Back View



Serial Connector



Sample application

